


Description

The led line 60 exists of an anodized aluminium profile with an opal diffusor. Optionally painted black or white. The led line 60 can be feed by 115-230VAC. Optionally PWM driver for dimming the leds (1-10V, DALI or DMX). Lightsource included: led modules that can be cut every 8cm. Power consumption of 28W/meter and a lumen output of up to 1600lm/meter. Standard in color temperature 3000K, cri 80. 115-230VAC Power supply included. PWM dimmer to be ordered separately. Size: 60mmx90mmx2000mm. To repair the led line it is not necessary to replace the complete ledline, the led modules can easily be replaced. Mounting options: recessed, surface mount, pendant. IP-class IP20 and protection class I.

Technical data


Size (WxHxL)	60x90mmx2000mm . Led modules can be cut each 8cm.
Power	28W /M
Voltage	115-230VAC
flux	1600lm/M
light beam	120°
color temperature	3000K
Weight	-
Lifetime	+50.000h
IP rating	IP20
Protection class	1
Certification	CE , RoHs
Warranty	5 year for the led modules , 2 year for the power supply and driver

Images

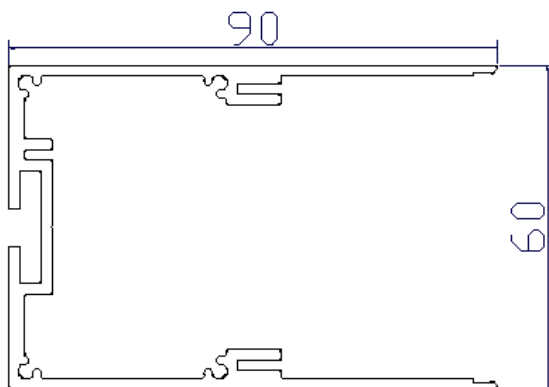



Ledline 60 – White - Surface mount

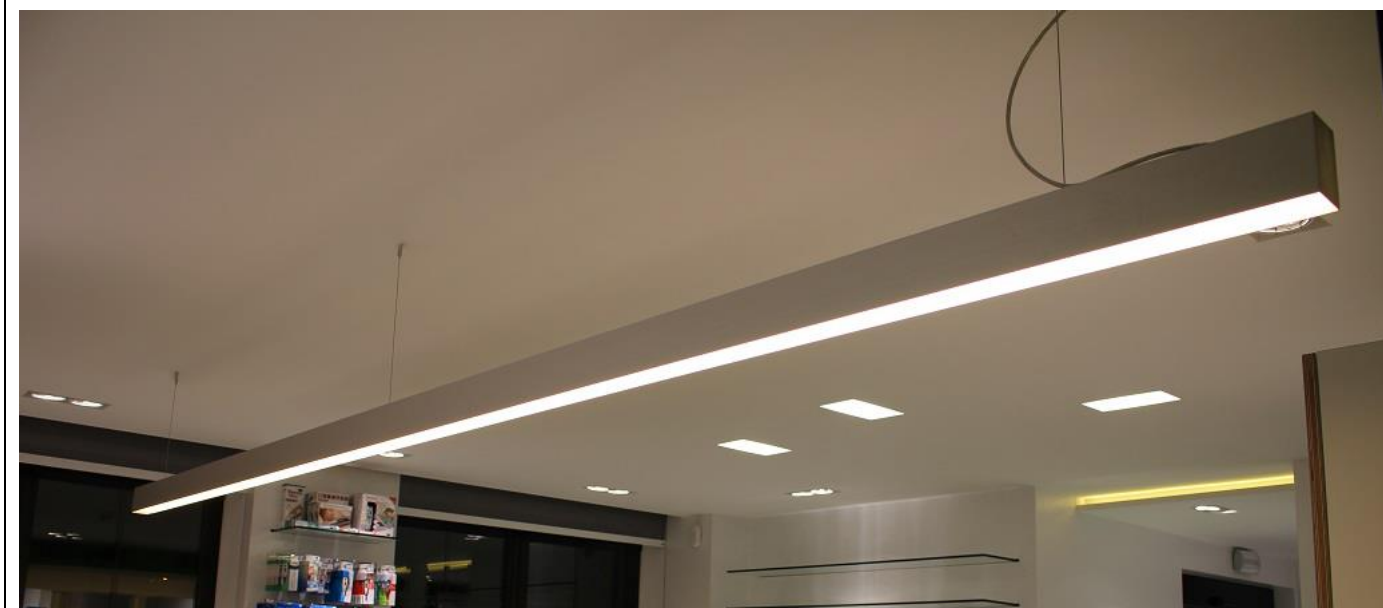

Ledline 60 – Aluminium - Pendant