


MOON R2

design: Lapo Grassellini



Supply current

Alimentazione
Courant d'alimentation
Stromversorgung
Corriente de alimentación

350-500 mA (V_f 2,9V)

Power

Potenza
Pouissance
Bestuekung
Potencia

1-2 W

Series wiring


Cablaggio in serie
Câblage en série
Verkabelung in Serie
Cableado en serie



CCT/CRI/Flux

	350mA	500mA
2700K	89 lm	128 lm
3000K	93 lm	133 lm
4200K	103 lm	154 lm

Photometric diagrams

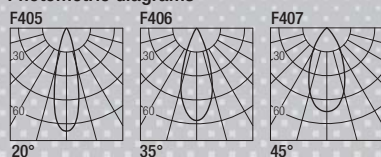

Code Construction

Costruzione del codice - Construction du code produit
Bau der Produkt-Code - Construcción del código de producto

MRS X X X

Beam angle

Apertura di fascio
Angle de faisceau
Strahlwinkel
Ángulo del haz

S M W
20° 35° 45°

Color

Temperature

Temperatura colore
Température couleur
Temperaturabhängige Farbe
Temperatura de color

2 3 4
2700K 3000K 4200K

Finishing

Finitura
Finitions
Oberflächenfinish
Acabados


1 5
White Black
Bianco Nero
Blanc Noir
Weiß Schwarz
Blanco Negro

Optionals

Accessori - Accessoires
Zubehör - Accesorios

Plasterboard recessing frame

Flangia per cartongesso
Boîtier d'encastrement pour plaques de plâtre
Gehäuses Trockenbau
Cajetín para placas de yeso



ZQC00K

White
Bianco
Blanc
Weiß
Blanco

ZQC00KB

Black
Nero
Noir
Schwarz
Negro

CV1202

12VDC/500mA constant current converter

Convertitore 12VDC/500mA corrente costante
Convertisseur 12VDC/500mA courant constant
12VDC/500mA konstanter Strom konverter
Convertidor 12VDC/500mA corriente constante




Drivers

Alimentatori - Alimentateurs
Netzteile - Alimentadores


on/off	dimmbale
350 mA	
AL1034 (1..11) 30mm IP20	AL4000 (1..12) 72mm IP20 PUSH 1..10V
AL1035 (1..11) 40mm IP20	AL4051 (1..12) 72mm IP20 DALI
AL1037 (1..16) 55mm IP20 S.P.	AL4053 (1..12) 60mm IP20 IGBT-TRIAC
AL9011 (1..12) 60mm IP67	

on/off	dimmbale
500 mA	
AL1074 (1..7) 30mm IP20	AL4010 (1..12) 72mm IP20 PUSH 1..10V
AL1077 (1..6) 40mm IP20	AL4151 (1..12) 72mm IP20 DALI
AL1084 (1..11) 55mm IP20 S.P.	AL4153 (1..12) 60mm IP20 IGBT-TRIAC
AL9051 (1..10) 60mm IP67	

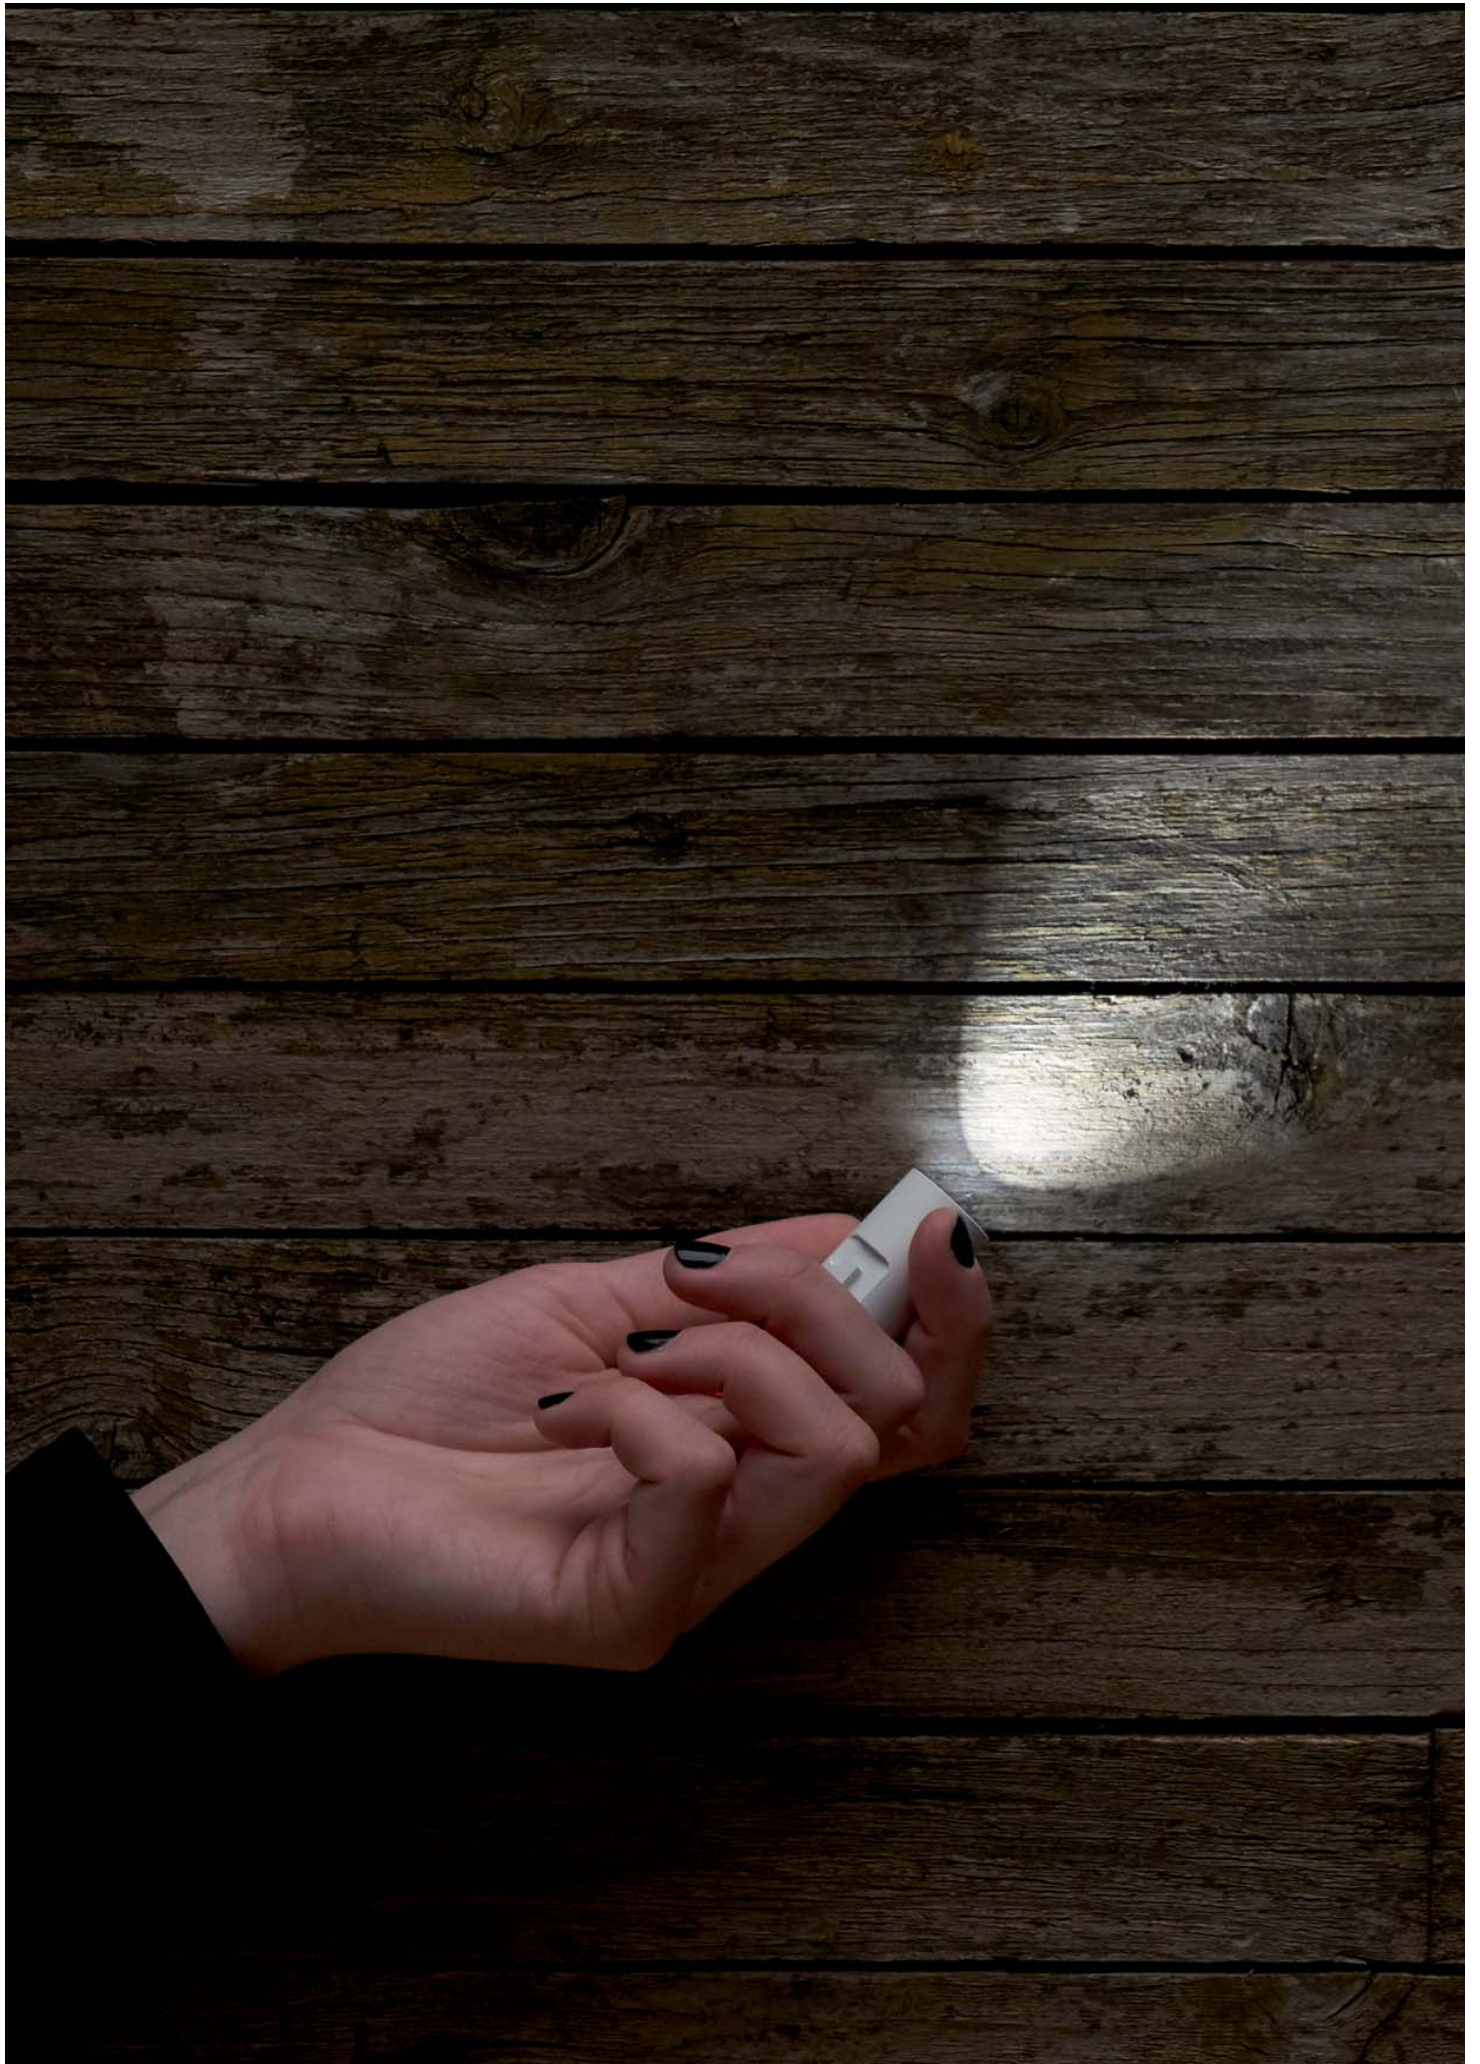

MOON R6

design: Lapo Grassellini



Supply current

Alimentazione
Courant d'alimentation
Stromversorgung
Corriente de alimentación

500 mA (V_i 9V)

Power

Potenza
Pouissance
Bestuekung
Potencia

6 W

Series wiring


Cablaggio in serie
Câblage en série
Verkabelung in Serie
Cableado en serie



CCT/CRI/Flux

CRI98
2700K — 540 lm
3000K — 600 lm
4000K — 620 lm

Photometric diagrams



Code Construction

Costruzione del codice - Construction du code produit
Bau der Produkt-Code - Construcción del código de producto

MRW X X X

Beam angle

Apertura di fascio
Angle de faisceau
Strahlwinkel
Ángulo del haz

S M
35° 45°

Color Temperature

Temperatura colore
Température couleur
Temperaturabhängige Farbe
Temperatura de color

2 3 4
2700K 3000K 4000K

Finishing

Finitura
Finitions
Oberflächenfinish
Acabados

1 5
White Black
Blanco Nero
Blanc Noir
Weiß Schwarz
Blanco Negro

Optionals

Accessori - Accessoires
Zubehör - Accesorios

Plasterboard recessing frame


Flangia per cartongesso
Boîtier d'encastrement pour plaques de plâtre
Gehäuses Trockenbau
Cajetín para placas de yeso

ZQC001

White
Bianco
Blanc
Weiß
Blanco

ZQC001B

Black
Nero
Noir
Schwarz
Negro



SC1002

Milky screen

Schermo opale
Écran opale
Opal-Bildschirm
Pantalla opal




Nota: lo schermo deve essere ordinato congiuntamente all'apparecchio - **Note:** the screen must be ordered together with the lighting fixture - **Note:** l'écran doit être commandé en même temps que l'appareil

Anmerkung: muss der Bildschirm zusammen mit Leuchtkörper bestellt werden - **Nota:** la pantalla debe pedirse junta con la luminaria

Drivers

Alimentatori - Alimentateurs
Netzteile - Alimentadores

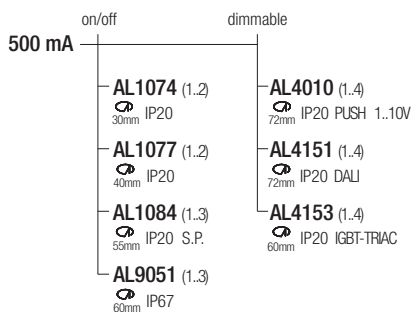

CV2402

24VDC/500mA constant current converter


Convertitore 24VDC/500mA corrente costante
Convertisseur 24VDC/500mA courant constant
24VDC/500mA konstanter Strom konverter
Convertidor 24VDC/500mA corriente constante





MOON R10

design: Lapo Grassellini




Supply current
Alimentazione
Courant d'alimentation
Stromversorgung
Corriente de alimentación
250 mA (V_f 37V)

Power
Potenza
Pouissance
Bestuekung
Potencia
10 W



Photometric diagrams

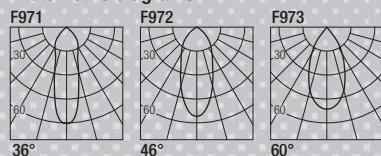


CCT/CRI/Flux

	CRI85	CRI93
2700K	890 lm	840 lm
3000K	1000 lm	930 lm
4000K	1040 lm	960 lm

Code Construction

Costruzione del codice - Construction du code produit
Bau der Produkt-Code - Construcción del código de producto

MR1 X X X X

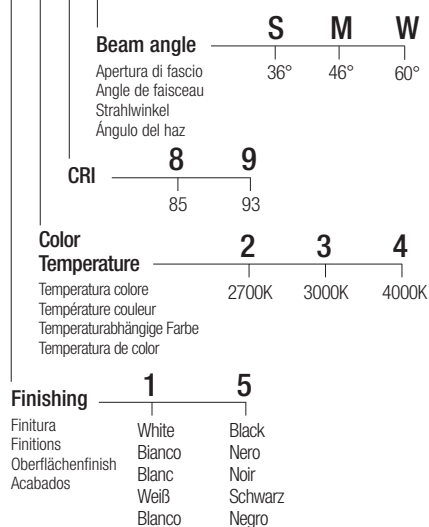

Optionals

Accessori - Accessoires
Zubehör - Accesorios

Low luminance louver
Filtro antiabbagliamento
Filtre basse luminance
Geringe Leuchtdichte-Filter
Filtro de baja luminancia




LOH1
White
Bianco
Blanc
Weiß
Blanco

LOH1B
Black
Nero
Noir
Schwarz
Negro

Plasterboard recessing frame

Flangia per cartongesso
Boîtier d'encastrement pour plaques de plâtre
Gehäuses Trockenbau
Cajetín para placas de yeso



MQC001

White
Bianco
Blanc
Weiß
Blanco

MQC001B

Black
Nero
Noir
Schwarz
Negro

SC1002

Milky screen

Schermo opale
Ecran opale
Opal-Bildschirm
Pantalla opal



Nota: lo schermo deve essere ordinato congiuntamente all'apparecchio
Note: the screen must be ordered together with the lighting fixture
Note: l'écran doit être commandé en même temps que l'appareil

Anmerkung: muss die Bildschirm zusammen mit Leuchtkörper bestellt werden
Nota: la pantalla debe pedirse junta con la luminaria

Drivers

Alimentatori - Alimentateurs
Netzteile - Alimentadores

