



°plug





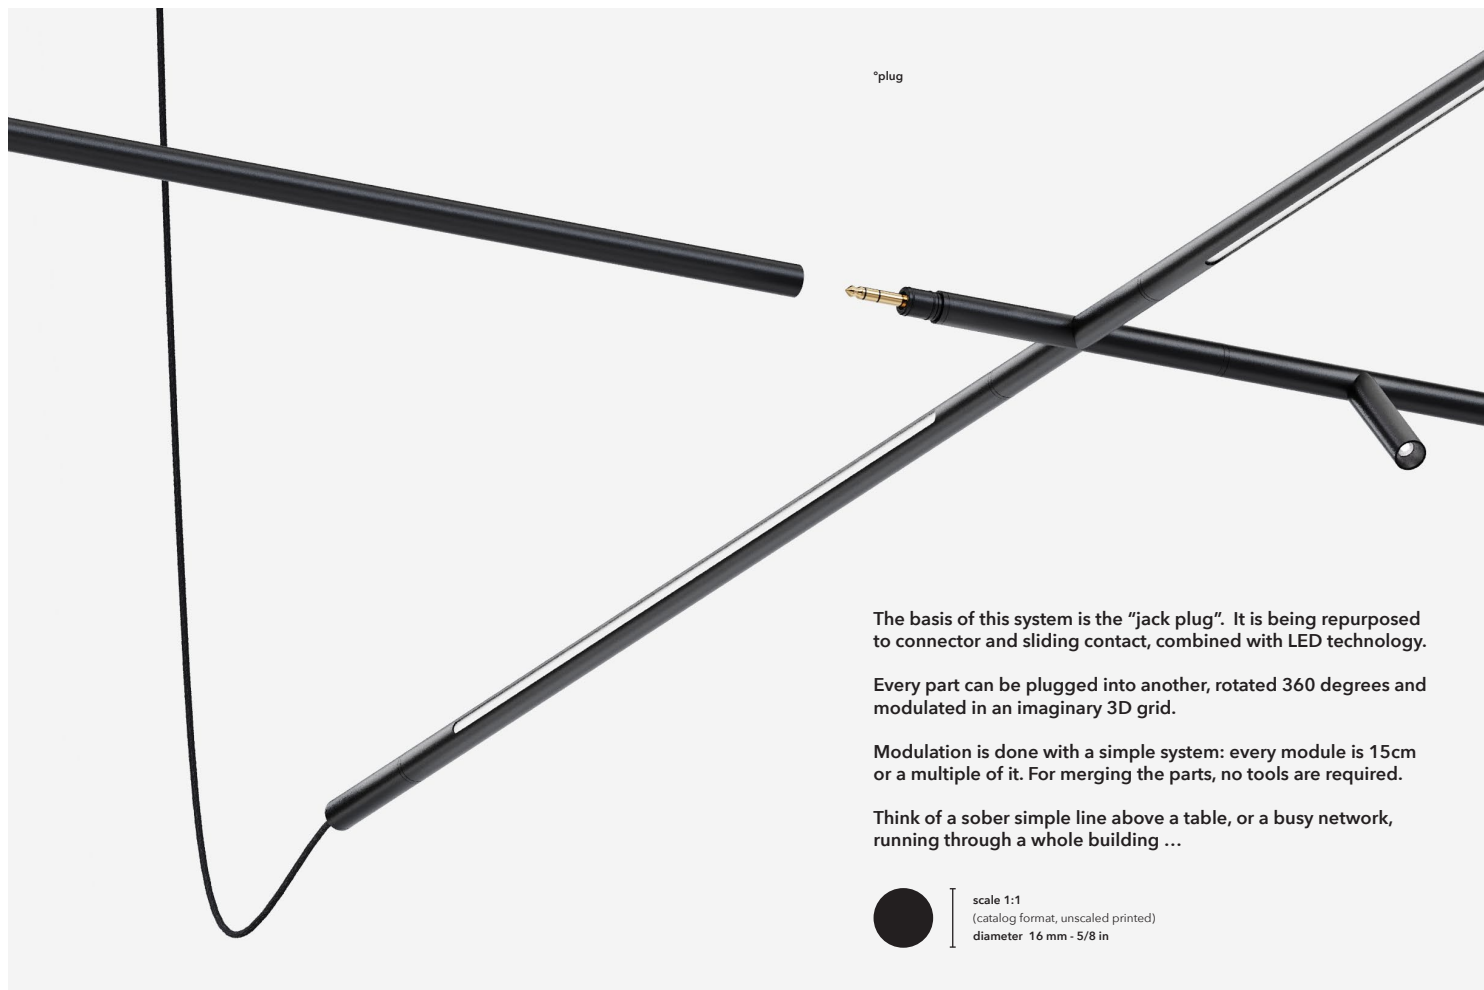

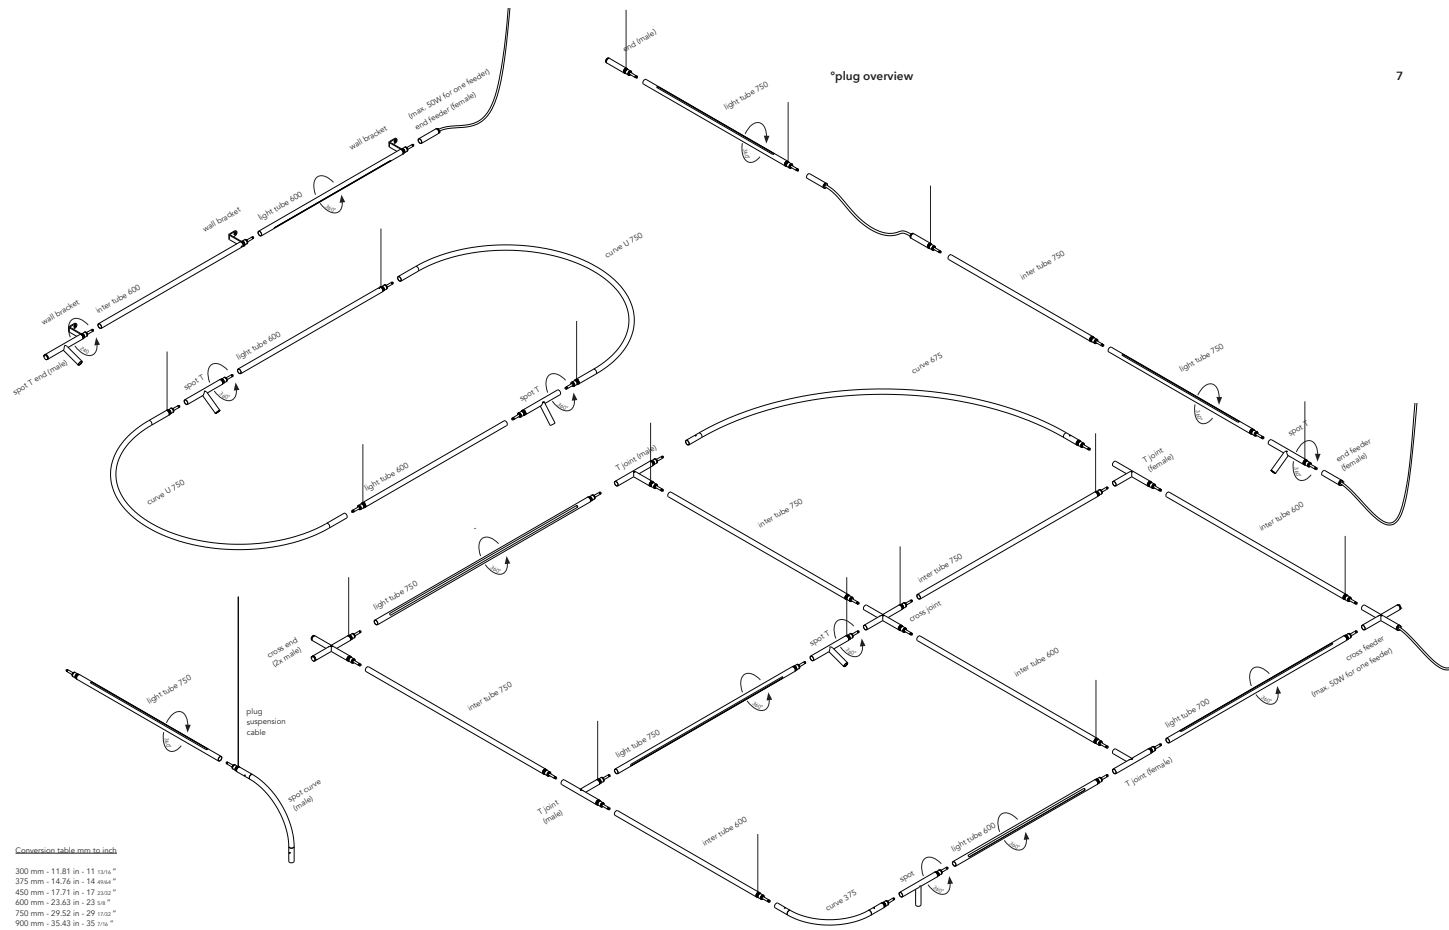

*plug
oval & wall configuration

*plug

13



*plug
spot & inter tube




*plug

*plug
grid configuration



*plug
spot curve pending configuration (Brewery de Els, Jeuris-Jordens)

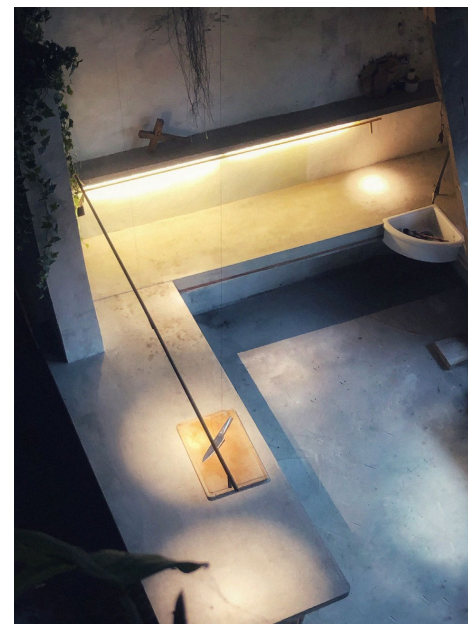

*plug
wall & pendant configuration (Brewery de Es, Jeuris-Jordens)

*plug
spot curve wall configuration





*plug
L - configuration (Brewery de Es, Jeuris-Jordens)



°spot T

materials aluminium anodised
weight 90 gr
voltage 24 Vdc
wattage 2,2 W
dimming push, dali, 0/1-10V, casambi

IP20 



Order Code

22001 AA00.BBBB.CCC.DD spot T
22002 AA00.BBBB.CCC.DD spot T end - male
22003 AA00.BBBB.CCC.DD spot T feeder - female with cable 2m
22004 AA00.BBBB.CCC.DD spot T feeder - female with cable 6m

AA Finish
21 black alu anodised brushed (standard color)
22 natural alu anodised brushed
23 brass alu anodised brushed (standard color)
25 bronze alu anodised brushed
26 dark bronze alu anodised brushed
03 painted custom NCS color

BBBB Light
9527 cri >95, 2700K
9530 cri >95, 3000K

CCC	Optic	Output for 3000K
100	10°	150 lm - 910 cd
200	20°	130 lm - 725 cd
350	35°	130 lm - 335 cd
600	60°	100 lm - 103 cd

DD Mounting
00 suspension ring
01 bracket


°spot curve

materials aluminium anodised
weight 90 gr
voltage 24 Vdc
wattage 2,2 W
dimming push, dali, 0/1-10V, casambi

IP20 



22021 spot curve - male



22022 spot curve - female

Order Code

22021.AA00.BBBB.CCC.DD spot curve - male
22022.AA00.BBBB.CCC.DD spot curve - female

AA	Finish
21	black alu anodised brushed (standard color)
22	natural alu anodised brushed
23	brass alu anodised brushed (standard color)
25	bronze alu anodised brushed
26	dark bronze alu anodised brushed
03	printed custom NCS color

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K


CCC	Optic	Output for 3000K
100	10°	150 lm - 910 cd
200	20°	130 lm - 725 cd
350	35°	130 lm - 335 cd
600	60°	100 lm - 103 cd

DD	Mounting
00	suspension ring
01	bracket

°light tube

materials aluminium anodised
weight 250 - 315 - 380 gr
voltage 24 Vdc
wattage 7,2 W - 9,4 W - 11,5 W
dimming push, dali, 0/1-10V, casambi

IP20  

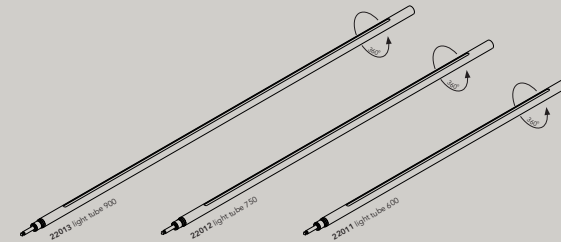

29

Order Code

22011 AA00.BBBB.CCC.DD light tube 600 (450 lm @3000K)
22012 AA00.BBBB.CCC.DD light tube 750 (585 lm @3000K)
22013 AA00.BBBB.CCC.DD light tube 900 (722 lm @3000K)


AA Finish
21 black alu anodised brushed (standard color)
22 natural alu anodised brushed
23 brass alu anodised brushed (standard color)
25 bronze alu anodised brushed
26 dark bronze alu anodised brushed
03 painted custom NCS color

BBBB Light
9527 cri >95, 2700K
9530 cri >95, 3000K

CCC Diffuser
001 frosted ice opal

DD Mounting
00 suspension ring
01 wall bracket

°inter tube °interrupt tube

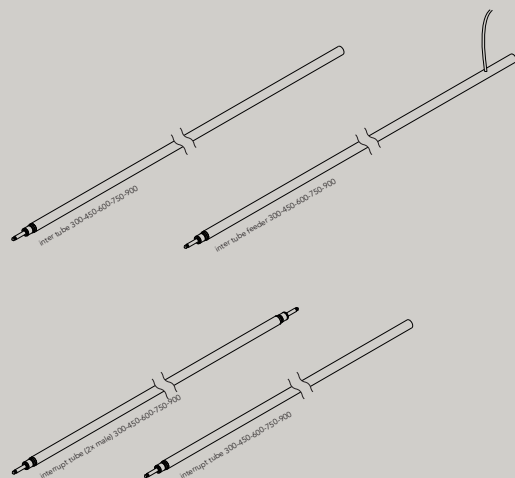

interrupt tube
There is no power transmission in this element.
Only in case multiple circuits are needed in a contiguous configuration.
Quantity and location defined by Eden Design.

31

Order Code

22101.AA00.DD inter tube 300
22102.AA00.DD inter tube 450
22103.AA00.DD inter tube 600
22104.AA00.DD inter tube 750
22105.AA00.DD inter tube 900
22106.AA00.DD inter tube custom length

22107.AA00.DD inter tube 300 feeder with cable 2m
22108.AA00.DD inter tube 450 feeder with cable 2m
22109.AA00.DD inter tube 600 feeder with cable 2m
22110.AA00.DD inter tube 750 feeder with cable 2m
22111.AA00.DD inter tube 900 feeder with cable 2m
22112.AA00.DD inter tube custom length feeder with cable 2m

22113.AA00.DD inter tube 300 feeder with cable 6m
22114.AA00.DD inter tube 450 feeder with cable 6m
22115.AA00.DD inter tube 600 feeder with cable 6m
22116.AA00.DD inter tube 750 feeder with cable 6m
22117.AA00.DD inter tube 900 feeder with cable 6m
22118.AA00.DD inter tube custom length feeder with cable 6m

AA 00 Finish

21 black alu anodised brushed (standard color)
22 natural alu anodised brushed
23 brass alu anodised brushed (standard color)

25 bronze alu anodised brushed
26 dark bronze alu anodised brushed
03 painted custom NCS color
00 no power cord
01 black power cord
02 white power cord
03 custom color power cord
04 transparent power cord

DD Mounting

00 suspension ring
01 wall bracket


22119.AA00.DD interrupt tube 300
22120.AA00.DD interrupt tube 450
22121.AA00.DD interrupt tube 600
22122.AA00.DD interrupt tube 750
22123.AA00.DD interrupt tube 900
22124.AA00.DD interrupt tube custom length

22125.AA00.DD interrupt tube 300 - 2x male
22126.AA00.DD interrupt tube 450 - 2x male
22127.AA00.DD interrupt tube 600 - 2x male
22128.AA00.DD interrupt tube 750 - 2x male
22129.AA00.DD interrupt tube 900 - 2x male
22130.AA00.DD interrupt tube custom length - 2x male

°cross & T



22201 cross joint




22221 T joint - male



22222 T joint - female



22211 cross end - female + male



22212 / 22213 cross end feeder



22214 cross end - 2x male



22215 cross end - 2x female

Order Code

22201.AA cross joint

22211.AA00 cross end - female + male
22212.AA00 cross end feeder - 2x female with cable 2m
22213.AA00 cross end feeder - 2x female with cable 6m
22214.AA00 cross end - 2x male
22215.AA00 cross end - 2x female


22221.AA00 T joint - male
22222.AA00 T joint - female

AA 00 Finish

21 black alu anodised brushed (standard color)
22 natural alu anodised brushed
23 brass alu anodised brushed (standard color)
25 bronze alu anodised brushed
26 dark bronze alu anodised brushed
03 painted custom NCS color
00 no power cord
01 black power cord
02 white power cord
03 custom color power cord
04 transparent power cord

°plug end

33

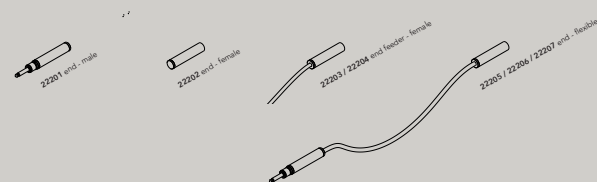

Order Code

22201.AA00.DD end - male
22202.AA00.DD end - female
22203.AA00.DD end feeder - female with cable 2m
22204.AA00.DD end feeder - female with cable 6m
22205.AA00.DD end - flexible 50cm
22206.AA00.DD end - flexible 100cm
22207.AA00.DD end - flexible custom length

AA 00 Finish

21 black alu anodised brushed (standard color)
22 natural alu anodised brushed
23 brass alu anodised brushed (standard color)
25 bronze alu anodised brushed
26 dark bronze alu anodised brushed
03 painted custom NCS color
00 no power cord
01 black power cord
02 white power cord
03 custom color power cord
04 transparent power cord

DD Mounting

00 suspension ring
01 wall bracket

°curve




22311 curve 375 - male/female




22312 curve 375 - 2x male




22313 curve 375 - 2x female

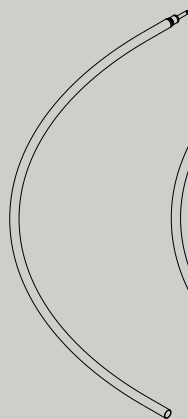

22321 curve 675 - male/female

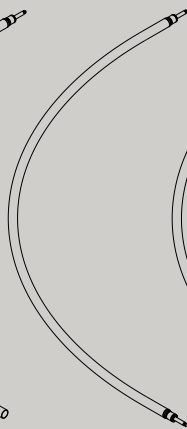


22322 curve 675 - 2x male

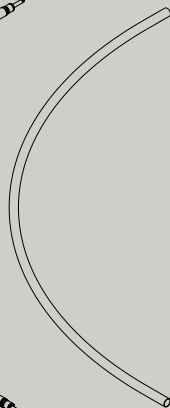

22323 curve 675 - 2x female

°plug

35

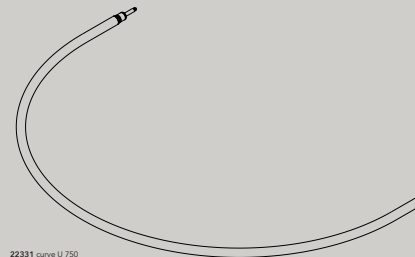

22331 curve U 750

Order Code

22311.AA00 curve 375 - male/female

22312.AA00 curve 375 - 2x male

22313.AA00 curve 375 - 2x female

22321.AA00 curve 675 - male/female

22322.AA00 curve 675 - 2x male

22323.AA00 curve 675 - 2x female

22331.AA00 curve U 750

AA Finish
 21 black alu anodised brushed (standard color)
 22 natural alu anodised brushed
 23 brass alu anodised brushed (standard color)
 25 bronze alu anodised brushed
 26 dark bronze alu anodised brushed
 03 painted custom NCS color

DD
 00 suspension ring
 01 bracket

°suspension

Order Code

22231 suspension silver color steel cable 2m
22232 suspension silver color steel cable 6m

Quantity of suspensions depends of the custom configuration.
Eden Design defines the quantity needed. In general every two or three joints, a suspension is needed.



°bracket

Order Code

See DD in order code element

Quantity of brackets depends of the custom configuration.
Eden Design defines the quantity needed. In general every two or three joints, a bracket is needed.



24V power supplies & controls

Power supplies

Order Code



90151.0000	Power supply, 24VDC, 60W - 90-305 VAC/50-60Hz - CE - cUL certified
90152.0000	Power supply, 24VDC, 100W - 90-305 VAC/50-60Hz - CE - cUL certified
90153.0000	Power supply, 24VDC, 150W - 90-305 VAC/50-60Hz - CE - cUL certified
90154.0000	Power supply, 24VDC, 240W - 90-305 VAC/50-60Hz - CE - cUL certified
90154.0000	Power supply, 24VDC, 300W - 90-305 VAC/50-60Hz - CE - cUL certified
90160.0000	Power supply, 24VDC, 060W - 120-240VAC/50-60Hz - CE - cUL listed - slim size type VLM
90161.0000	Power supply, 24VDC, 096W - 120-240VAC/50-60Hz - CE - cUL listed - slim size type VLM

Dimming modules

Order Code



90032.0000	Dimmodule 24V pwm, 240W control by DALI, 0/1-10V, push
90033.0000	Dimmodule 24V pwm, 240W control by casambi