

K A I A

L I A

'Cutting through darkness'

Designed by Peter Straka
Vienna 2005-07


L I A's three-flamed elegance captivates when on, yet this suspension light almost disappears into its surrounding when the lights are off.



Process: The brass is cut, bent in its shape and polished. Then all the components are nickel plated or the brass is brushed and painted with a clear lacquer to maintain the natural effect of the brass. Lastly all parts are assembled to the L I A lighting object.

L I A

Wall Sconce
100



Type
Material
Environment
Dimension
Weight
Certification
EU/UK
Lamps

Wall/ceiling light
Brass
Indoors
1000 x 125 mm
2.1 kg
IP20 CE
230 V
max 2 x 120W, S14s
our suggestion:
2 x linear opal LED, 2700 K,
Mains (Phase) dimmable,
EPREL-ID: 566195

Standard finishes:

050 12 101
050 12 201
050 12 202
050 12 209


polished nickel
brushed nickel
brushed brass
blackened brass

* On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.

** Please contact sales@kaialighting.com for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.

LIA

Wall Sconce
50



Type
Material
Environment
Dimensions
Weight
Certification
EU/UK
Lamps

Wall/ceiling light
Brass
Indoors
500 x 125mm
1.9 kg
IP20 CE
230 V
max. 2 x 60 W, S14s
our suggestion:
2x linear opal LED, 2700 K,
Mains (Phase) dimmable,
EPREL-ID: 566200


Standard finishes:

050 13 101
050 13 201
050 13 202
050 13 209

polished nickel
brushed nickel
brushed brass
blackened brass

LIA

Wall Sconce
30



Type
Material
Environment
Dimensions
Weight
Certification
EU/UK
Lamps

Wall/ceiling light
Brass
Indoors
300 x 125mm
1.8 kg
IP20 CE
230 V
max. 2 x 35 W, S14s
our suggestion:
2x linear opal LED, 2700 K,
Mains (Phase) dimmable,
EPREL-ID: 566198


Standard finishes:

050 14 101
050 14 201
050 14 202
050 14 209

polished nickel
brushed nickel
brushed brass
blackened brass

LIA

Suspension
Wall

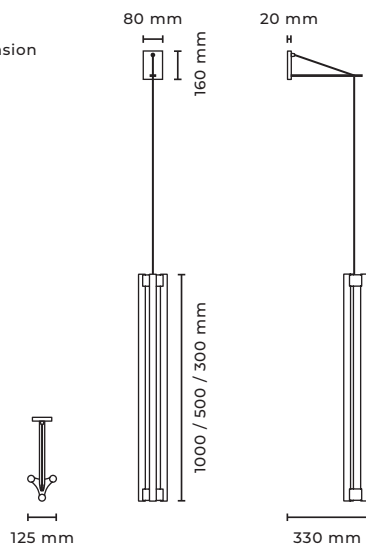

Type
Material
Environment
Dimensions
Cable Length
Weight
Certification
EU/UK
Lamps

Suspension light
Brass
Indoors
1000/500/300 mm
Standard mounting 1500 mm
2.1 kg
IP20 CE
230 V
our suggestion: 3 x linear opal
LED, 2700 K, Mains (Phase)
dimmable

Standard finishes:

Wall Bracket
050 11 201
050 11 202
050 11 209

brushed nickel
brushed brass
blackened brass