


°bloc line^{new}

Bloc is now available as full length profile.
Choose your down and up lights.



Wall



300, 600 mm
or custom



°bloc

The first linear lighting system available in a wide variety of high quality materials to offer a solution to your unique requirements.

Interchangeable °bloc units clip onto a surface mounted track.

Design by etre moderne

°bloc

85





« bloc spot, walnut & brass brushed & « bloc, walnut & white carrara
House, Belgium - architect Pascal François - photograph by Thomas De Bruyne (c@f@e@n@e@b@e)



°bloc spot, bianco carrara & °bloc, oak with custom dye finish
Apartment, Belgium - Rubens-Frédéric architecten




°bloc.spot (oak) & °bloc (carrara)



°bloc.spot, brushed brass & °bloc, carrara bianco / showroom Lumaires, NYC




set-up guide

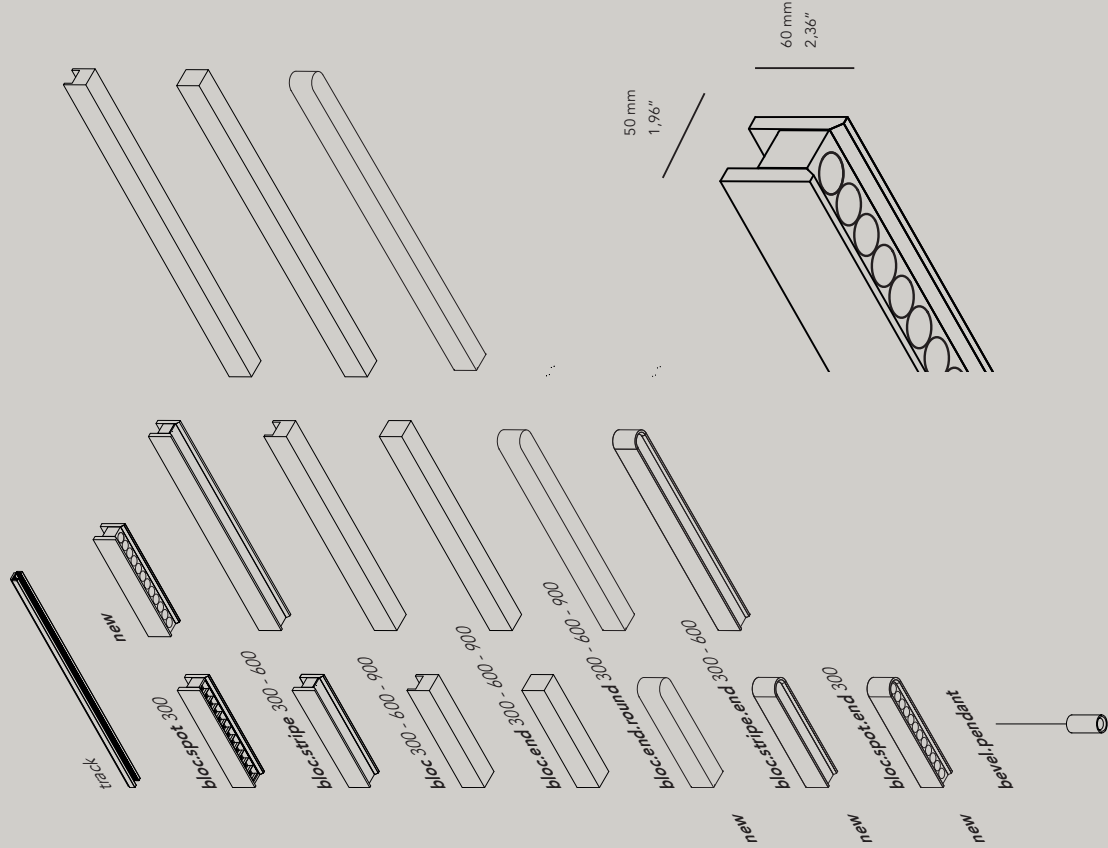

Order Code	BBBB	Length
20000.0100.BBBB	bloc track black	0300 300 mm
		1000 1000 mm
		2000 2000 mm
		3000 3000 mm

Accessories


20252.0000	bloc track pendant 2 m steel cable suspension (incl. elec. cable)
20253.0000	bloc track pendant 2 m steel cable suspension
20254.0000	bloc track pendant 2 m bar suspension (incl. elec. cable)
20255.0000	bloc track pendant 2 m bar suspension

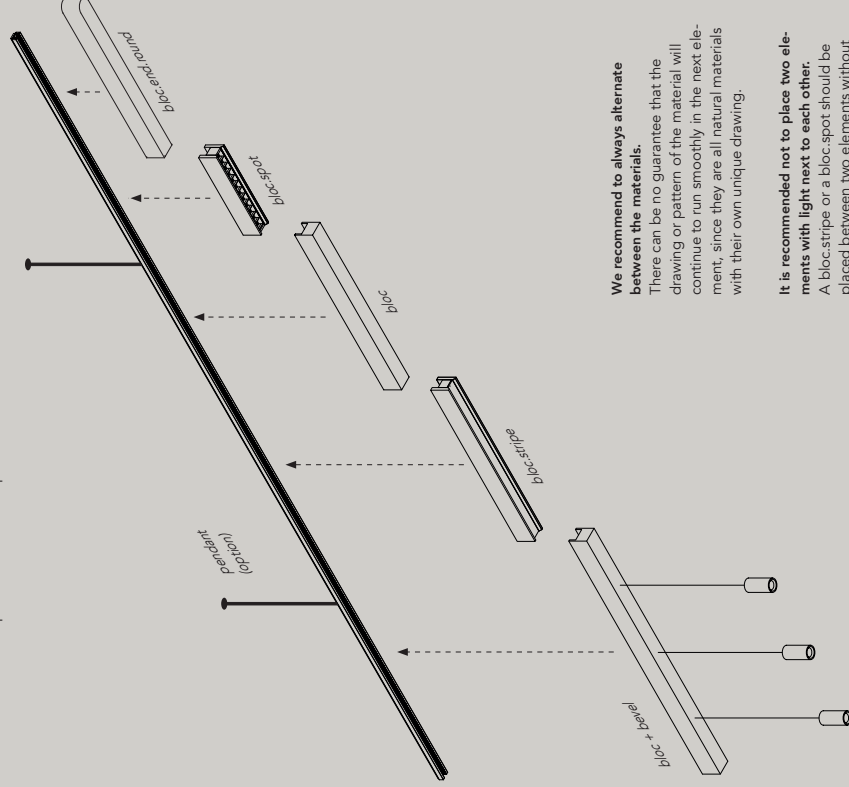

We recommend to always alternate between the materials.
There can be no guarantee that the drawing or pattern of the material will continue to run smoothly in the next element, since they are all natural materials with their own unique drawing.

It is recommended not to place two elements with light next to each other.
A blocstripe or a blocspot should be placed between two elements without light (full material).

Powersupply in bloc elements

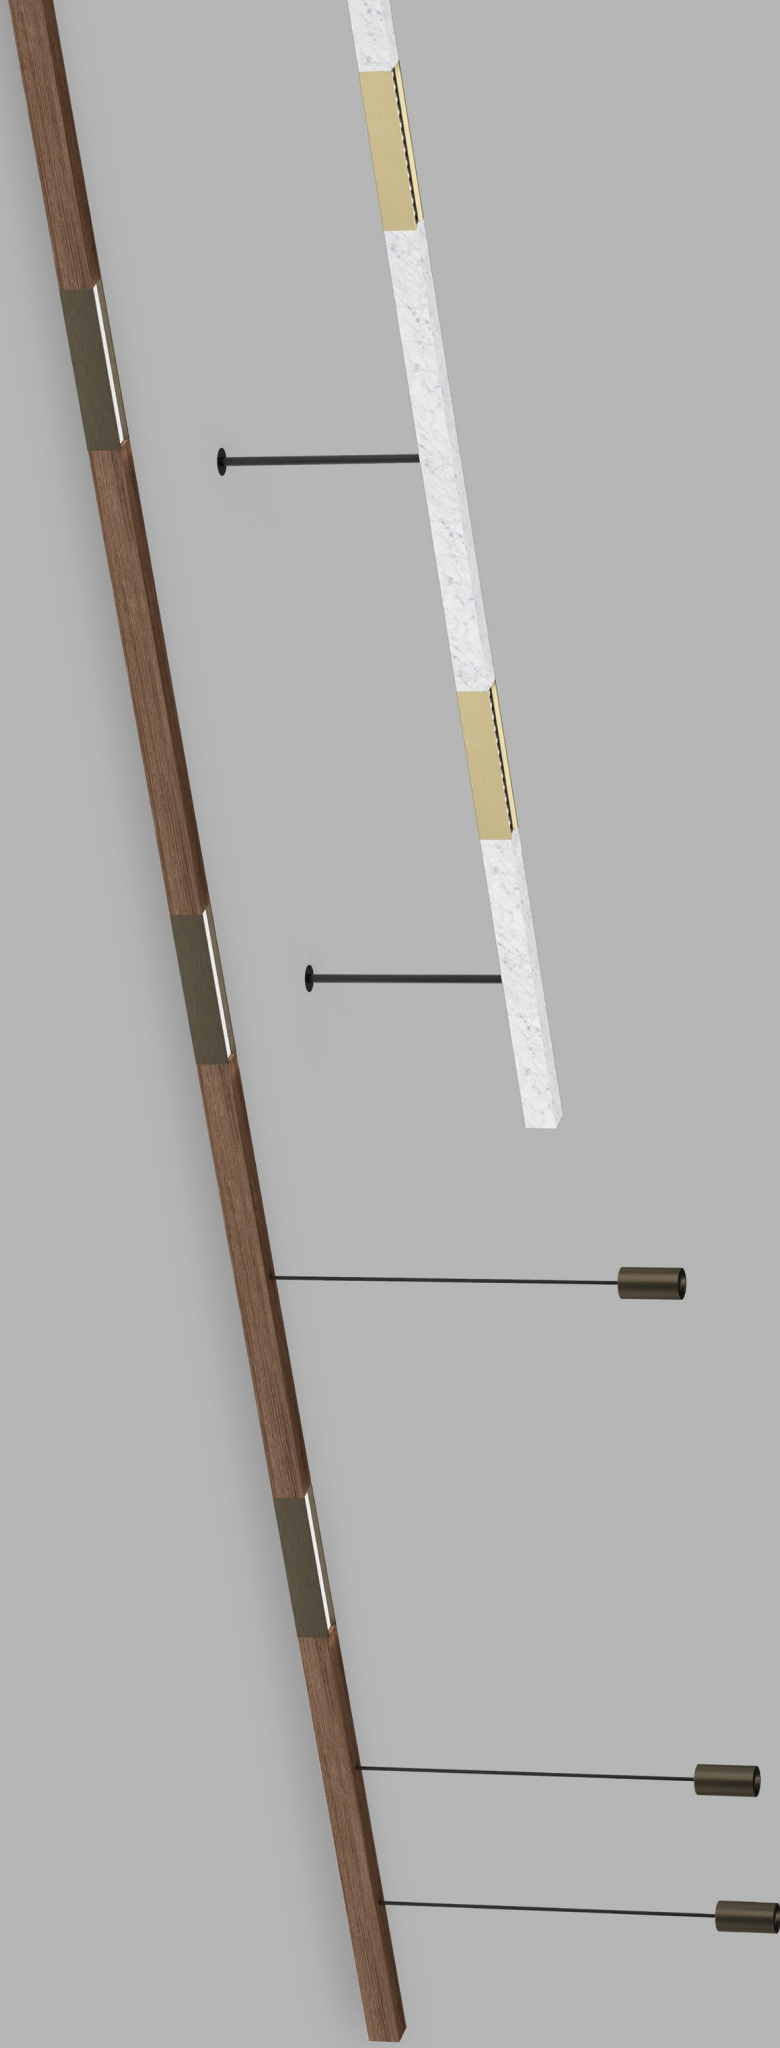


%bloc / surface mounted & pendant

°bloc.spot

materials
weight
voltage
ugr
wattage
dimming

aluminium coated or anodised / PC
from 0,5-5kg
48 Vdc
<10
13W - 26W (high output)
DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20  



Order Code

20300.AA00.BB8B.CCC.DD
bloc spot 300 - square reflector
20301.AA00.BB8B.CCC.DD
bloc spot 300 - square reflector high output
20302.AA00.BB8B.CCC.DD
bloc spot 300 - round reflector
20303.AA00.BB8B.CCC.DD
bloc spot 300 - round reflector high output
20304.AA00.BB8B.CCC.DD
bloc spot 300 - round reflector end
20305.AA00.BB8B.CCC.DD
bloc spot 300 - round reflector end high output

bloc.spot - brass alu brushed - square reflector




bloc.spot - brass alu brushed - round reflector



natural alu anodised brushed + oak intense black dye



bronze alu brushed + walnut

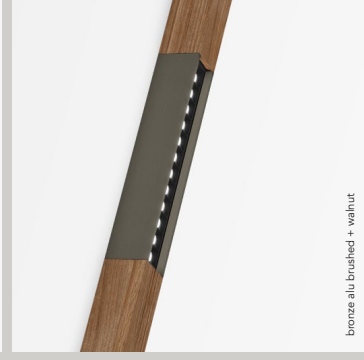

AA
01 black coated
02 white coated
21 black alu brushed
22 natural alu brushed
23 brass alu brushed
25 bronze alu brushed
26 dark bronze alu brushed

Finish

On request (round end version & high output not possible)
walnut, natural, natural waxed
oak natural, natural waxed
oak classic brown dye
oak intense black dye
carrara bianco extra, honed

BB8B
9527
9530
9540

Light

cri >95, 2700K
cri >95, 3000K
cri >95, 4000K - on request

CCC
200
300
600

Optic

20 deg 1090lm - 5450cd
30 deg 1055lm - 3310cd
60 deg 1090lm - 1200cd

DD

Dimming

no dimming
dali (0/1-10V, switchDIM, Casambi through interface)

High output*

1870lm - 9770cd
1820lm - 5750cd
1870lm - 2060cd


* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°bloc.stripe

materials
weight
voltage
wattage
dimming

aluminium coated or anodised / PC
from 0,5-5kg
48 Vdc
8,2W - 16,4W (high output)
DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20 



Order Code

- 20400.AA00.BBBB.CCC.DD.bloc stripe 300
- 20401.AA00.BBBB.CCC.DD.bloc stripe 300 high output
- 20402.AA00.BBBB.CCC.DD.bloc stripe 300 end
- 20403.AA00.BBBB.CCC.DD.bloc stripe 300 end high output
- 20410.AA00.BBBB.CCC.DD.bloc stripe 600
- 20411.AA00.BBBB.CCC.DD.bloc stripe 600 high output
- 20412.AA00.BBBB.CCC.DD.bloc stripe 600 end
- 20413.AA00.BBBB.CCC.DD.bloc stripe 600 end high output

*only available for alu anodised finish & black/white paint



*Bloc stripe 300 - brass alu brushed + natural oak



*Bloc stripe 600 - brass alu brushed + carrara bianco



brass alu brushed, round end + carrara bianco



bronze alu brushed + oak classic brown dye

AA	Finish		
01	black coated		
02	white coated		
21	black alu brushed		
22	natural alu brushed		
23	brass alu brushed		
25	bronze alu brushed		
26	dark bronze alu brushed		
On request (round end version & high output not possible)			
40	walnut, natural waaved		
41	oak natural, natural waaved		
42	oak classic brown dye		
43	oak imperial black dye		
45	oak classic black dye		
61	carrara bianco extra, honed		
BBBB	Light		
9527	cri >95, 2700K		
9530	cri >95, 3000K		
9540	cri >95, 4000K - on request		
CCC	Optic	Output	High output*
001	frosted ice	880lm - 310cd	1610lm - 560cd
002	micropism	780lm - 370cd	1430lm - 680cd
DD	Dimming		
ND	no dimming		
DA	dali (0/1-10V, switchDIM, Casambi through interface)		


* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°bloc.mono

materials
weight
voltage
wattage
dimming


aluminium coated or anodised / PC
from 0,5-5kg
48 Vdc
8,2W - 16,4W (high output)
DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20 



Order Code

20400 .AA00.BBBB.CCC.DD.bloc.spot.mono.300
20401 .AA00.BBBB.CCC.DD.bloc.spot.mono.300.high.output
20402 .AA00.BBBB.CCC.DD.bloc.mono.stripe.300
20403 .AA00.BBBB.CCC.DD.bloc.mono.stripe.300.high.output
20410 .AA00.BBBB.CCC.DD.bloc.mono.stripe.600
20411 .AA00.BBBB.CCC.DD.bloc.mono.stripe.600.high.output

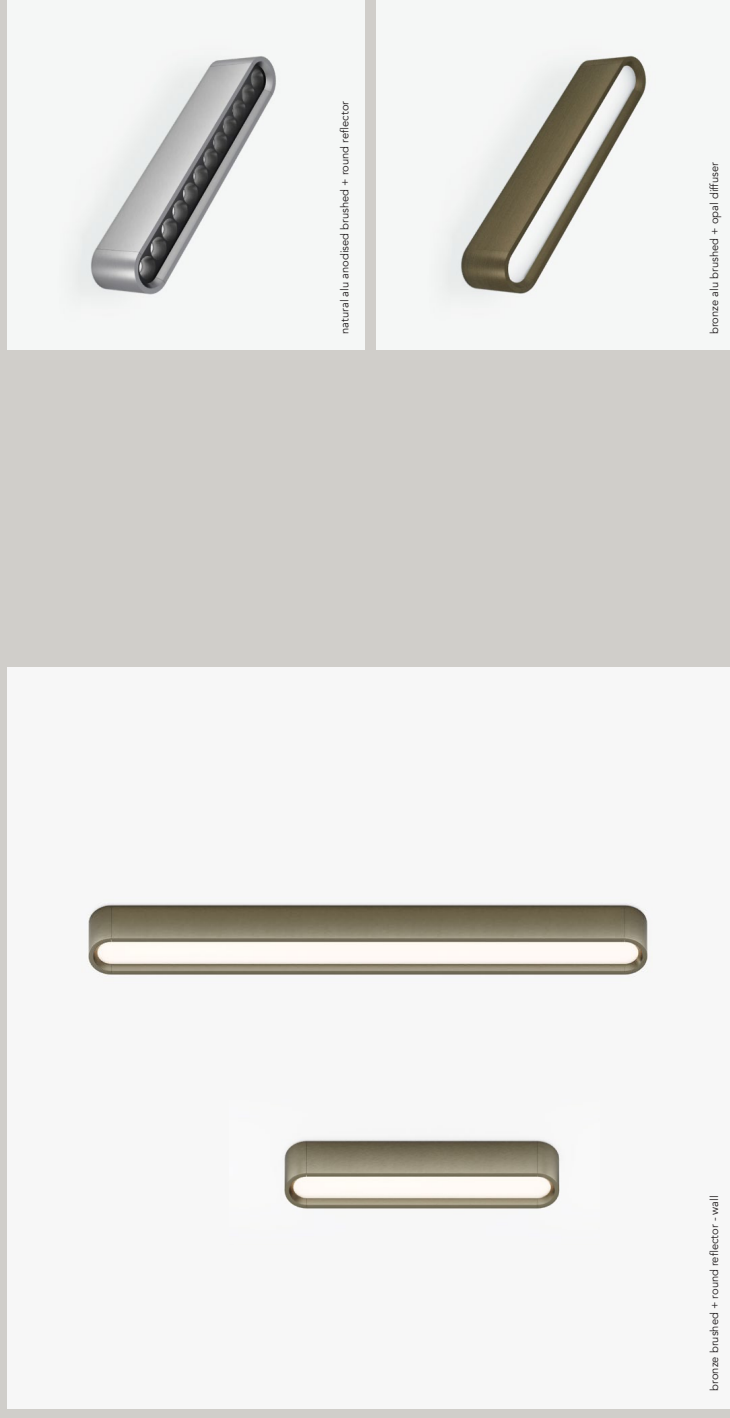

AA	Finish
01	black coated
02	white coated
21	black alu brushed
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed
BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request
CCC	Optic
001	frosted ice diffuser
002	micropism diffuser
200	20 deg spots
300	30 deg spots
600	60 deg spots
DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)
	Output
	880lm - 310cd**
	780lm - 370cd**
	1090lm - 5650cd
	1055lm - 3310cd
	1090lm - 1200cd
	High output*
	1610lm - 560cd**
	1430lm - 680cd**
	1870lm - 9770cd
	1820lm - 5750cd
	1870lm - 2060cd

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.
** For stripe 300

°bloc

Order Code

20600 AA00 bloc 300
20610 AA00 bloc 600
20620 AA00 bloc 900
20601 AA00 bloc 300 end
20611 AA00 bloc 600 end
20621 AA00 bloc 900 end
20603 AA00 bloc 300 end round
20613 AA00 bloc 600 end round
20623 AA00 bloc 900 end round

bloc


300-600-900

bloc end

300-600-900

bloc end round

300-600-900

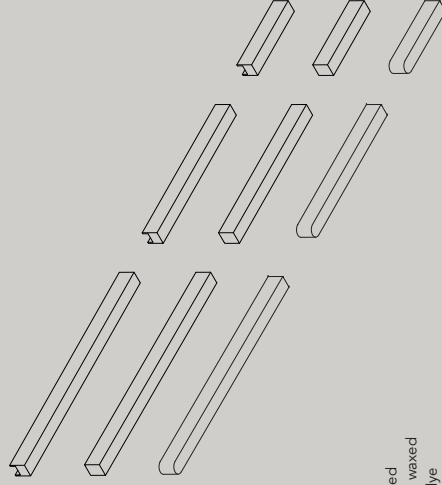

AA

Finish

01 black
02 white
40 walnut, natural waxed
41 oak natural, natural waxed
42 oak classic brown dye
43 oak intense black dye
61 carrara bianco extra, honed

Custom material on request


Oak can be dyed in reference color

00


Driver

00 not included
01 power supply 100W included

°bloc colors

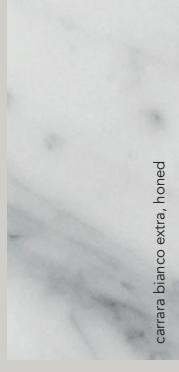


carrara bianco extra, honed

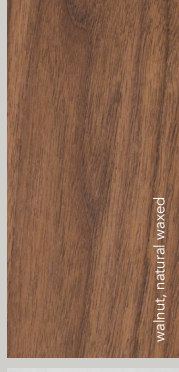


walnut, natural waxed




natural alu color

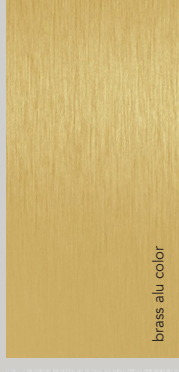

brass alu color

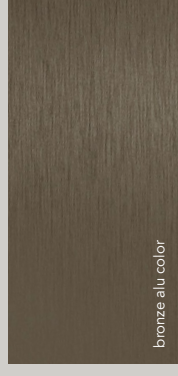


bronze alu color

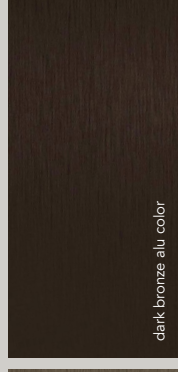


dark bronze alu color




black alu color

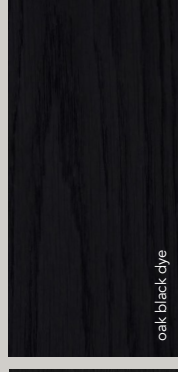

oak black dye

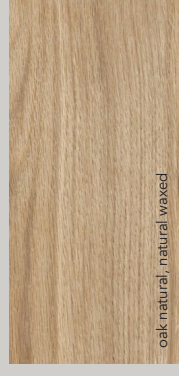

oak natural, natural waxed

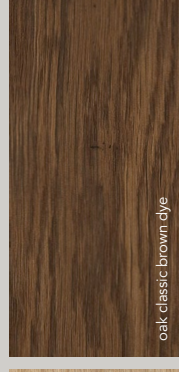

oak classic brown dye

scale 1/1 - Differences in colors and patterns may occur since these are natural materials.




°bloc.bevel

materials
weight
voltage
wattage
ugr
dimming

aluminium coated or anodised / PC
600gr / 1.32lb
48 Vdc
8,2 W
<19
DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*

*from Q3 2020

IP20 

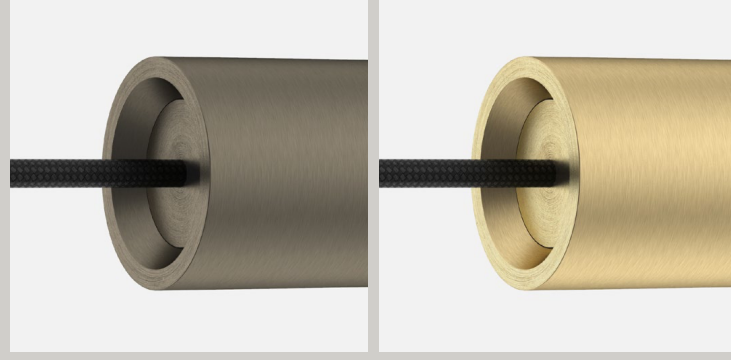

Order Code

20500 AA00 BBBB.CCC.DD bevel

20501 AA00.BBBB.CCC.DD bevel monopoint

°bevel must always be accompanied with a °bloc (see page 141)

max. 1 °bevel on bloc.300

max. 2 °bevel on bloc.600

max. 3 °bevel on bloc.900

AA	Finish
01	black
02	white
22	aluminum anodised brushed
23	brass anodised brushed
25	bronze anodised brushed
26	dark bronze anodised brushed

BBBB

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K

CCC

CCC	Optic
300	30°
450	45°
600	60°

Output*

670lm - 1550cd
700lm - 1070cd
690lm - 811cd

DD

Dimming	
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

Accessories

10150.0100 recessed ceiling rose black, Ø50 mm
10150.0200 recessed ceiling rose white, Ø50 mm

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.



°bloc.line

materials
weight
voltage
wattage
dimming

aluminium coated or anodised / PC
3 kg/m
48 Vdc or Powersupply 110-240V
8,2W - 16,4W (high output)
DALI, 0-10V, 1-10V, switchDIM, Casambi, Google home & amazon Alexa

IP20  



Order Code

21503 AA00.BBBB.CCC.DD.EE bloc line 1550 mm, 3 spots
21500 AA00.BBBB.CCC.DD.EE bloc line 1550 mm, diffuser

22104 AA00.BBBB.CCC.DD.EE bloc line 2150 mm, 4 spots
22100 AA00.BBBB.CCC.DD.EE bloc line 2150 mm, diffuser

22705 AA00.BBBB.CCC.DD.EE bloc line 2650 mm, 5 spots
22700 AA00.BBBB.CCC.DD.EE bloc line 2650 mm, diffuser

Custom configuration on simple request

AA Finish
01 black
02 white
21 black alu brushed
22 natural alu brushed
23 brass alu brushed
25 bronze alu brushed
26 dark bronze alu brushed

00 Suspension
00 surface
01 pendant 2m
02 pendant 6m

BBBB Light
9527 cri >95, 2700K
9530 cri >95, 3000K
9540 cri >95, 4000K - on request

CCC Down Light
001 frosted ice diffuser
002 microprism diffuser
200 20 deg spots
300 30 deg spots
600 60 deg spots

measurement in process
measurement in process
1090lm - 5450cd/spot
1055lm - 3310cd/spot
1090lm - 1200cd/spot

DD Dimming
ND no dimming
DA dali (0/1-10V, switchDIM, Casambi through interface)

EE Up Light
001 none
002 upright (same color light as downlight)

Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

